C034-XX 3.5/Male to 3.5/Female 34 GHZ 2 Watt Attenuator

Rev 000

Electrical	
Frequency	DC-34 GHZ
VSWR	1.25
Impedance	50 Ohms
Mechanical	
Operating Temperature	-55°C to +125°C
Materials	
Body	Passivated Stainless Steel
Contact	Brass(Male) BeCu(Female)
Contact Plating	Au 50µ" Min
ROHS Compliant	

Power Handling	
Average	2 Watts at 25°C derated linearly to 0.5 Watts at 125°C

Attenuation Accuracy (Max)		
1-10 dB	20 dB	30 dB
-0.7/+0.8 dB	±0.8 dB	±0.80 dB

Outline

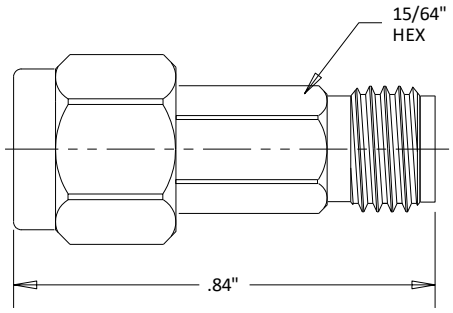

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Related Links			
Typical Data		**Product Page**	
C034-1	C034-10	C034-1	C034-10
C034-2	C034-15	C034-2	C034-15
C034-3	C034-20	C034-3	C034-20
C034-6	C034-30	C034-6	C034-30

1130 Junction Dr. Suite 100. Allen, TX 75013 800-399-6891 www.CentricRF.com