



C0825-XX SMA Directional Coupler 0.8-2.5 GHz


Rev 000

Electrical	
Frequency	0.8-2.5 GHz
VSWR	1.20 Max
Impedance	50 Ohms
Flatness	± 0.7 dB
Directivity	20 dB Min
Power Handling	50W CW
Mechanical	
SMA Interface per	MIL-STD-348B
Operating Temperature	-55°C to +85°C
Materials	
Contacts	BeCu
Contact Plating	Au
ROHS Compliant	



	6	10	20	30
Coupling	± 1.0	± 1.0	± 1.0	± 1.0
Insertion Loss	0.5	0.5	0.4	0.4

Outline

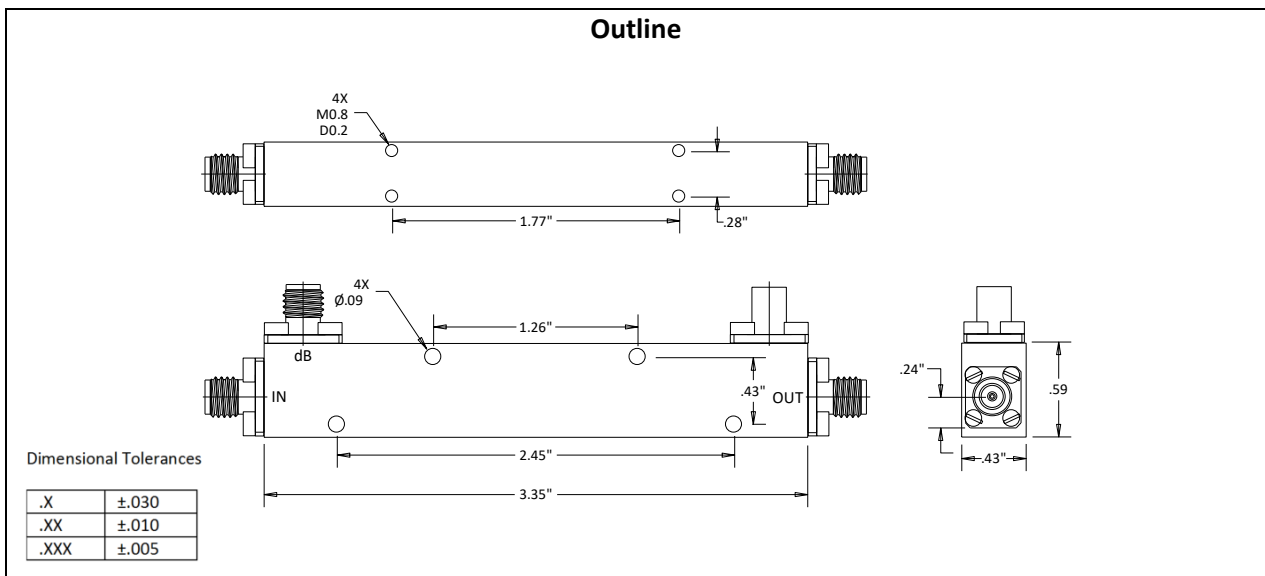

1130 Junction Dr. Suite 100. Allen, TX 75013 800-399-6891 www.CentricRF.com