C225M-10 2.2/5-Male 10 Watt Termination 6 Ghz

Rev 000

Electrical	
Frequency	0-6 GHZ
VSWR	1.25 Max
Impedance	50 Ohms
Mechanical	
2.2/5 Interface Per	IEC 61169-66
Operating Temperature	-45°C to +85°C
Materials	
Body	Tri-alloy plated Brass
Contacts	Brass
Contact Plating	Au 50µ" Min
Dielectric	PTFE
ROHS Compliant	

Power Handling	
Average	10 Watts at 25°C, de-rated linearly to 2 at 85°C
Peak	200 Watts (100µsec pulse width, 1% duty cycle)

Outline

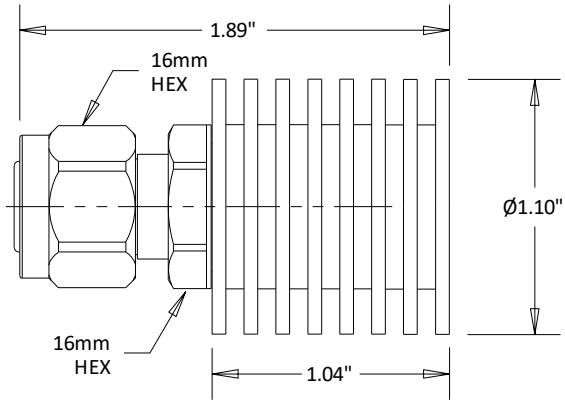

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

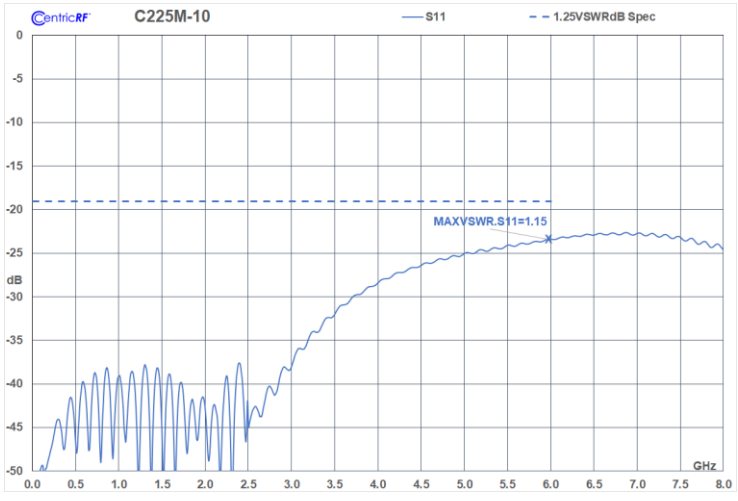

1130 Junction Dr. Suite 100. Allen, TX 75013 800-399-6891 www.CentricRF.com