C408-XX 2.92/Male to 2.92/Female 10 Watt 40 GHZ Attenuator

Rev 001

Electrical	
Frequency	0-40 GHZ
VSWR	1.30
Impedance	50 Ohms
Mechanical	
2.92 Interface per	MIL-STD-348B
Operating Temperature	-55°C to +125°C
Materials	
Body(Connector)	Passivated Stainless Steel
Contacts	BeCu(Female); Brass(Male)
Contact Plating	Au 50µ" Min
Body	Black Anodized Aluminum
ROHS Compliant	

Power Handling	
Average	10 Watts at 25°C, de-rated linearly to 1 Watts at 125°C

Attenuation Accuracy (Max)	
	DC to 40 GHZ
3-40 dB	±1.20 dB

***Unidirectional Input/Output is marked on physical units**

Outline

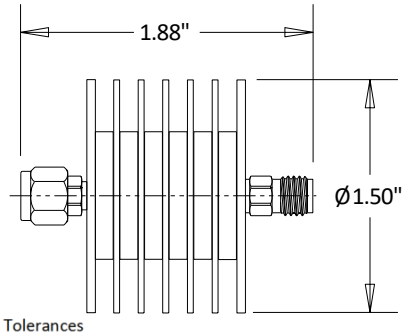

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Related Links			
Typical Data		**Product Page**	
C408-3	C408-20	C408-3	C408-20
C408-6	C408-30	C408-6	C408-30
C408-10	C408-40	C408-10	C408-40

1130 Junction Dr. Suite 100. Allen, TX 75013 800-399-6891 www.CentricRF.com