C4104 SMP/Female to SMP/Female Bullet Adapter 27 GHZ

Rev 000

Electrical	
Frequency	0-27 GHZ
VSWR	1.20 to 27 GHZ
Impedance	50 Ohms
Mechanical	
SMP Interface per	MIL-STD-348B
Materials	
Body	BeCu per ASTM-B-196
Contact Plating	Au Per MIL-G-45204
Dielectric	PTFE per ASTM D1710
ROHS Compliant	

Outline

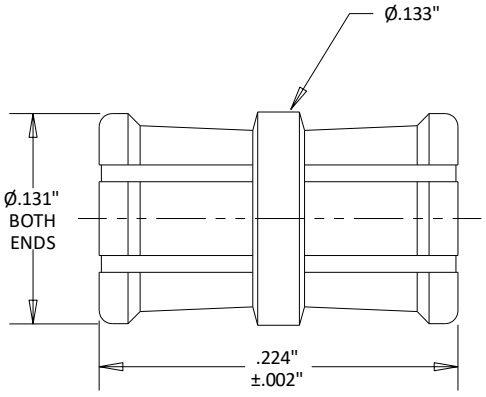

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

1130 Junction Dr. Suite 100. Allen, TX 75013 800-399-6891 www.CentricRF.com