




## C4255 2.92/Male to SMP/Female Adapter 40 GHZ

Rev 000

<b>Electrical</b>	
Frequency	0-40 GHZ
VSWR	1.25 to 25 GHZ
Impedance	50 Ohms
<b>Mechanical</b>	
2.92 & SMP Interface per	MIL-STD-348
Operating Temperature	-65°C to +165°C
<b>Materials</b>	
Connectors	Passivated Stainless Steel per A582
Female Contacts	BeCu per ASTM-B-196
Contact Plating	Au Per MIL-G-45204
ROHS Compliant	



### Outline

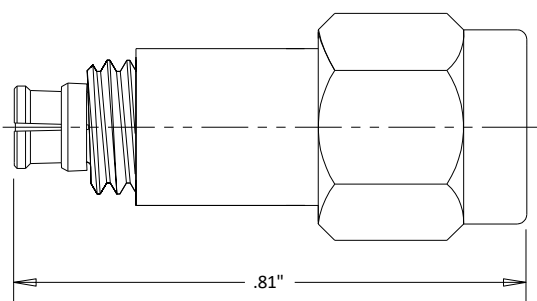

#### Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

### Typical Data

