




## C4310-2C 4.3/10 Male 2 Watt Termination 6 GHZ with Chain

Rev 000

<b>Electrical</b>	
Frequency	0-6 GHZ
VSWR	1.20 Max
Impedance	50 Ohms
Power Handling	2 Watts at 25°C Derated Linearly to 1W at 100°C
Peak Power	250 Watts Max (1% Duty Cycle, 50µsec pulse)
<b>Mechanical</b>	
Operating Temperature	-45°C to +100°C
<b>Materials</b>	
Body	Trimetal(Cu/Sn/Zn)
Contact	Brass
Contact Plating	Au 30µ" Min
Dielectric	PTFE
Chain Ball	Nickel Plated Brass
Chain Eyelet	Passivated Stainless Steel
IP67 Rated(Mated condition)	
ROHS Compliant	



### Outline

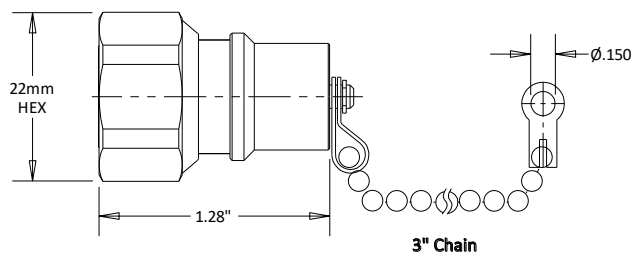

#### Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

### Typical Data

