




C4870 N/Male Short Circuit

Rev 002

Electrical	
Frequency	0-18 GHZ
Mechanical	
N Interface per	MIL-STD-348B
Operating Temperature	-65°C to +165°C
Materials	
Body	Nickel Plated Brass
Contacts	BeCu
Contact Plating	Au per MIL-G-45204
ROHS Compliant	



Outline

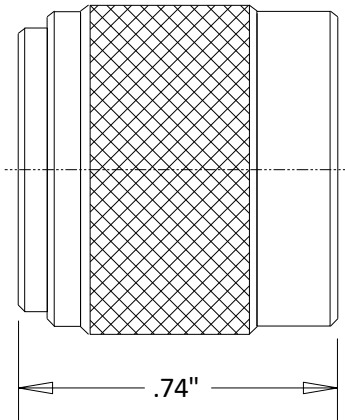

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005