C4930 BNC/Female to C/Female Adapter 4 GHZ

Rev 001

Electrical	
Frequency	0-4 GHZ
VSWR	1.25 Max
Impedance	50 Ohms
Mechanical	
BNC Interface per	MIL-STD-348B
Operating Temperature	-65°C to +165°C
Materials	
Body	Nickel Plated Brass
Contacts	BeCu(C), Brass(BNC)
Contact Plating	Au per MIL-G-45204
Dielectric	PTFE
ROHS Compliant	

Outline

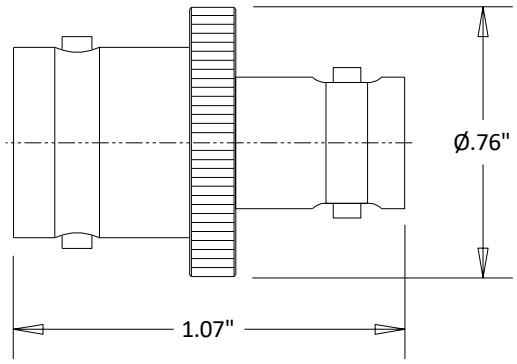

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

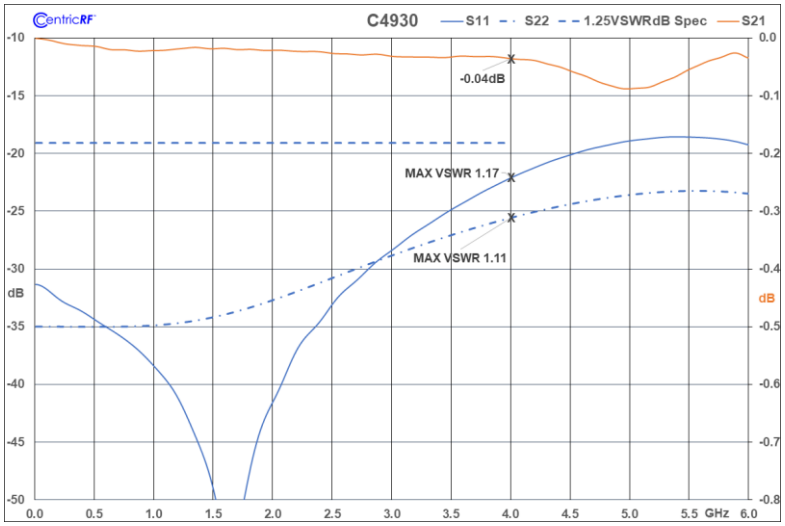

1130 Junction Dr. Suite 100. Allen, TX 75013 800-399-6891 www.CentricRF.com