




C504 2.4/Male 1 Watt Termination 50 GHZ

Rev 003

Electrical	
Frequency	0-50 GHZ
VSWR	1.25 Max
Impedance	50 Ohms
Power Handling	1 Watt Average @ -40°C to +70°C Derated Linearly to 0.7 Watts @ 105°C
Mechanical	
2.4 Interface per	MIL-STD-348B
Materials	
Body	Passivated Stainless Steel
Contacts	BeCu
Contact Plating	SucoPRO
ROHS Compliant	



Outline

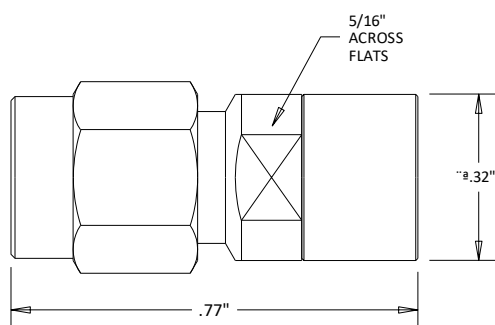

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

