




C505C 2.4/Male 1 Watt Termination with Chain 50 GHZ

Rev 000

Electrical	
Frequency	0-50 GHZ
VSWR	1.30 Max
Impedance	50 Ohms
Power Handling(Avg)	1 Watt Average @ 25°C
Mechanical	
2.4 Interface per	IEEE P287
Operating Temperature	-55°C to +125°C
Materials	
Body	Passivated Stainless Steel
Contacts	BeCu
Contact Plating	Au 50μ" Min
ROHS Compliant	



Outline

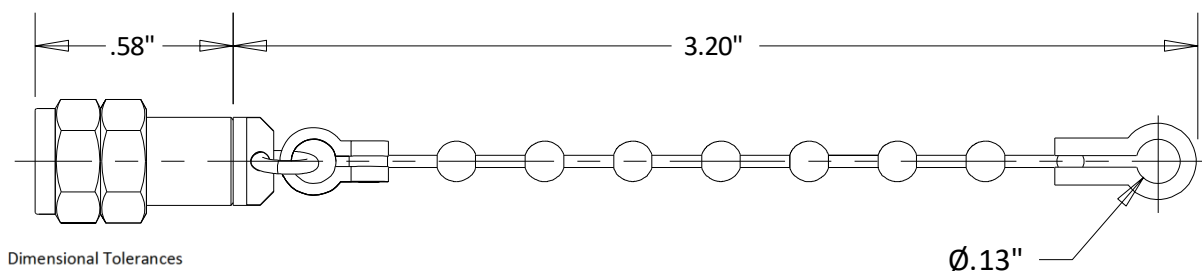

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005