




## C555-086-XX 2.92/Male to 2.92/Male Tight Curve Flexible Cable Assembly 40 GHZ

Rev 000

<b>Electrical</b>	
Frequency	0-40 GHZ
VSWR	1.40(3"-6"); 1.35( $\geq 8$ " )
Impedance	50 Ohms
Insertion Loss	0.82/ft Max @ 18 GHZ 1.00/ft Max @ 26.5 GHZ 1.29/ft Max @ 40 GHZ 0.3 dB per connector
<b>Mechanical</b>	
2.92 Interface per	MIL-STD-348B
<b>Materials</b>	
Outer Jacket Diameter	.104"
2.92 Connector Body	Passivated Stainless Steel
Contacts	BeCu
Contact Plating	Au 50 $\mu$ " Min

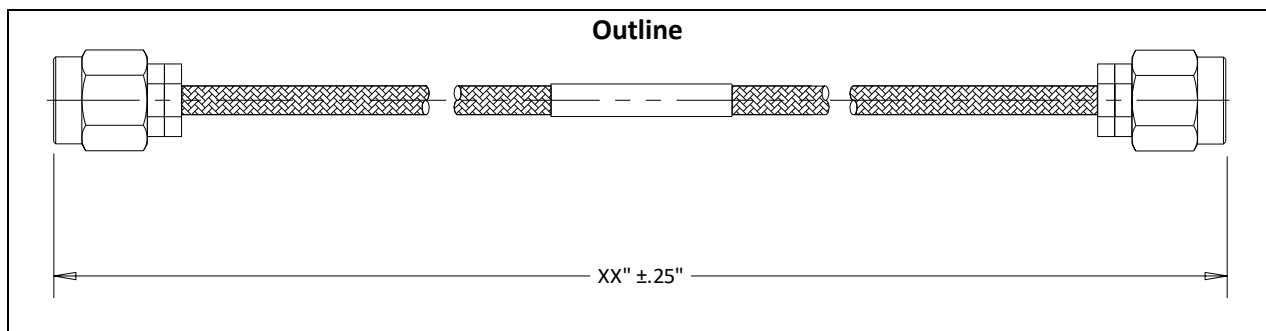

1130 Junction Dr. Suite 100. Allen, TX 75013 800-399-6891 [www.CentricRF.com](http://www.CentricRF.com)