




C572-086 SMA/Male to SMP/Female Cable Assembly 18 GHZ

Rev 001

Electrical	
Frequency	0-18 GHZ
VSWR	1.35 Max to 18 GHZ
Impedance	50 Ohms
Mechanical	
SMA & SMP Interface per	MIL-STD-348B
Operating Temperature	-55°C to +125°C
Materials	
Raw Cable	RG-405
Outer Shield Diameter	.086"
Overall Diameter	.110"
SMA Connector Body	Passivated Stainless Steel
SMP Body	Au plated BeCu
Contacts(SMA)	Brass
Contacts(SMP)	BeCu per ASTM-B-196
Contact Plating	Au Per MIL-G-45204



Outline

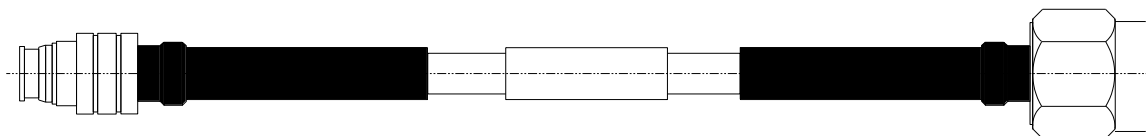

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005