C580-094-XXB SMA/Male to SMA/Male Low Loss Phase Stable Cable Assembly with Armored Jacket 18 GHZ

Rev 000

Electrical	
Frequency	0-18 GHZ
VSWR	1.25 Max
Impedance	50 Ohms
Mechanical	
SMA Interface per	MIL-STD-348B
Materials	
Overall Jacket Diameter	.236”
SMA Body	Passivated Stainless Steel
SMA Contacts	Au Plated BeCu
Contact Plating	Au 50µ” Min
Min Bend Radius(Install)	1.25”
ROHS Compliant	

Raw Cable Loss					
Ghz	1	6	10	14	18
dB/f	.13	.33	.43	.51	.58

Outline

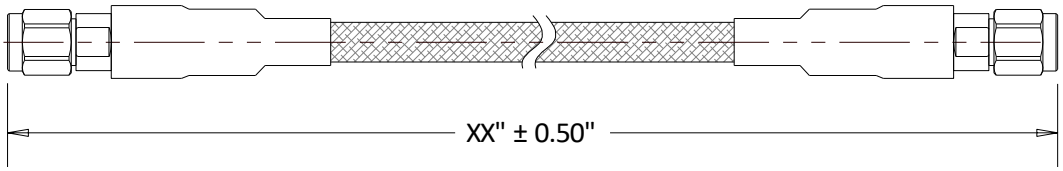

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

1130 Junction Dr. Suite 100. Allen, TX 75013 800-399-6891 www.CentricRF.com