C7704 3.5/Female to 3.5/Female Adapter 33 GHZ

Rev 000

Electrical	
Frequency	0-33 GHZ
VSWR	1.15
Impedance	50 Ohms
Mechanical	
3.5 Interface per	IEC 60619-23
Operating Temperature	-45°C to +125°C
Materials	
Body	Passivated Stainless Steel
Contacts	BeCu
Contact Plating	Au 50µ" Min
ROHS Compliant	

Outline

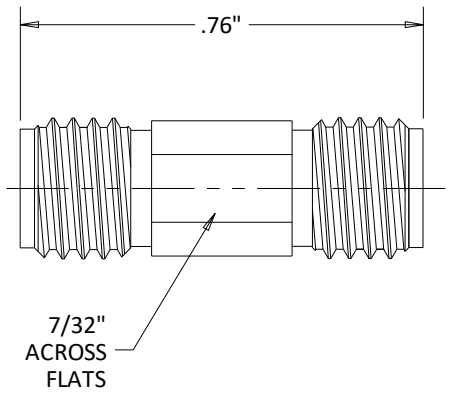

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

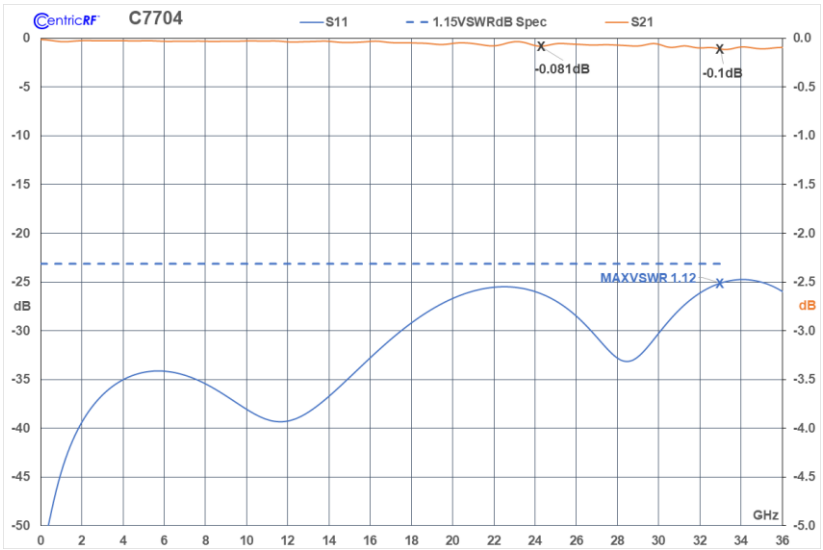

1130 Junction Dr. Suite 100 Allen, TX 75013 800-399-6891 www.CentricRF.com