C8366 7/16-Female to SC/Male Adapter 7.5 GHZ

Rev 000

Electrical	
Frequency	0-7.5 GHZ
VSWR	1.25 Max
Impedance	50 Ohms
PIM	<-160 dBc 900/1800 Mhz
Mechanical	
7/16 Interface per	IEC 61169-4
SC Interface per	IEC 61169-21
Operating Temperature	-40°C to +155°C
Materials	
Body	Tri-Metal plated Brass
Contacts	Bronze
Contact Plating	Silver
Dielectric	PTFE
ROHS Compliant	

Outline

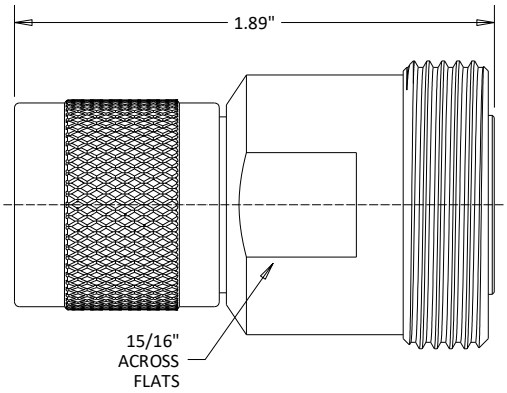

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

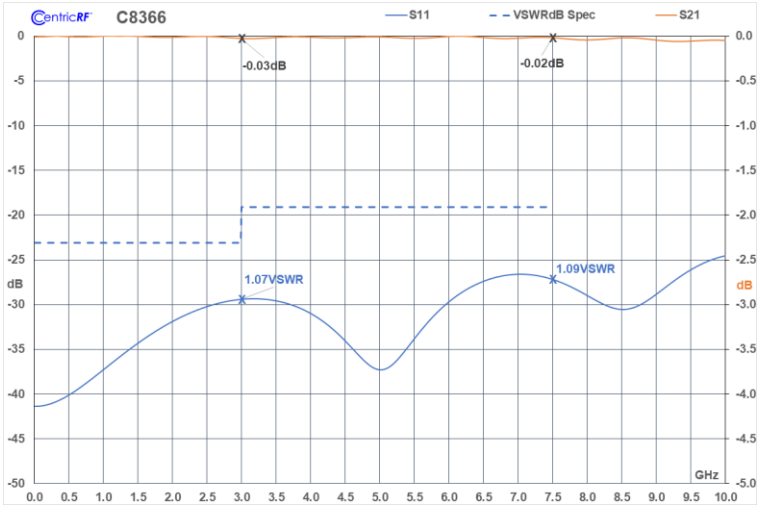

1130 Junction Dr. Suite 100. Allen, TX 75013 800-399-6891 www.CentricRF.com