




## C9931 SMA/Female to 1.0/2.3 Jack Adapter 6 GHZ

Rev 001

<b>Electrical</b>	
Frequency	0-6 GHZ
VSWR	1.15
Impedance	50 Ohms
<b>Mechanical</b>	
SMA Interface per	MIL-STD-348B
Operating Temperature	-55°C to +105°C
<b>Materials</b>	
Body	Au Plated Brass
Contacts	BeCu
Contact Plating	Au 30μ" Min
Dielectric	PTFE
ROHS Compliant	



### Outline

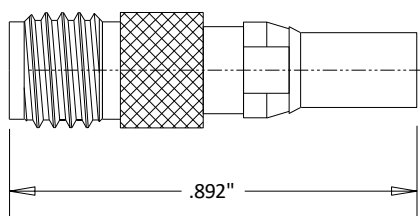

#### Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

### Typical Data

