C9957 SMA/Male to MMBX/Jack Adapter 12.4 GHZ

Rev 000

Electrical	
Frequency	0-12.4 GHZ
VSWR	1.30 Max
Impedance	50 Ohms
Mechanical	
SMA Interface per	MIL-STD-348B
Operating Temperature	-55°C to +125°C
Materials	
Body(MMBX)	Au Plated Brass
Body(SMA)	Passivated Stainless Steel
Contacts	BeCu
Contact Plating	Au 30µ" Min
ROHS Compliant	

Outline

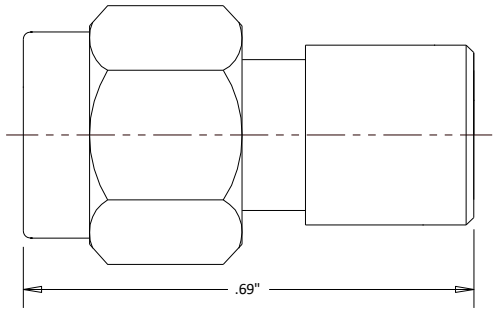

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

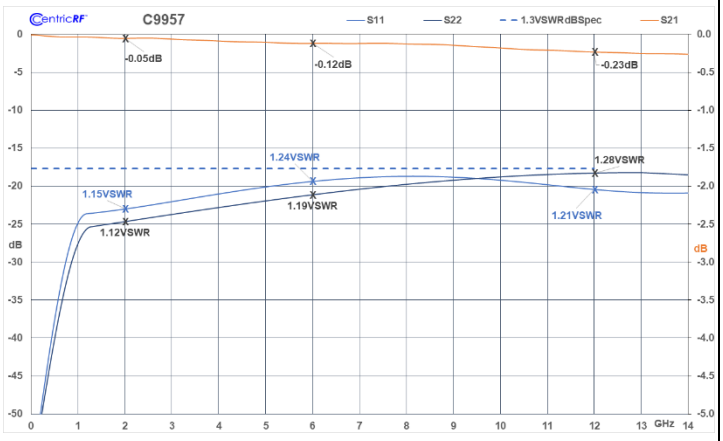

1130 Junction Dr. Suite 100. Allen, TX 75013 800-399-6891 www.CentricRF.com