CD9545 BNC/Male to BNC/Female Inner DC Block 10 Mhz - 3 GHZ

Rev 001

Electrical	
Frequency	10 Mhz – 3 GHZ
VSWR	1.35
Impedance	75 Ohms
Voltage	200 Volts DC Max
Insertion Loss	0.5 dB Max
Mechanical	
BNC Interface per	MIL-STD-348B
Operating Temperature	-40°C to +105°C
Materials	
Body	Passivated Stainless Steel
Contacts	Phosphor Bronze
Contact Plating	Au 50µ”
Dielectric	PTFE
ROHS Compliant	

Outline

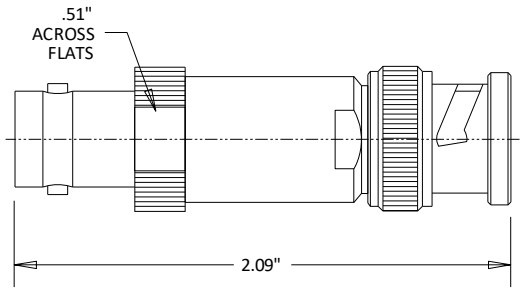

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

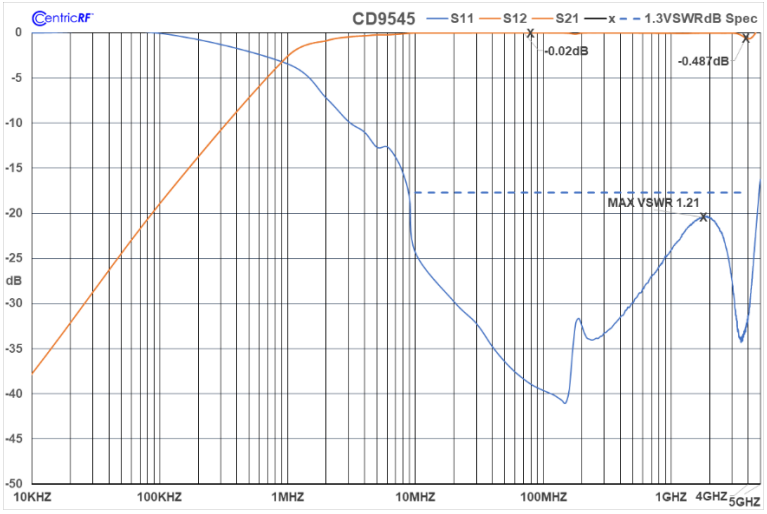

1130 Junction Dr. Suite 100. Allen, TX 75013 800-399-6891 www.CentricRF.com