




CR25S30B SMA/Female 5 Watt 30 dB Push Button Attenuator 2.5 GHz

Rev 000

Electrical	
Frequency	0-2.5 GHz
VSWR	1.40
Impedance	50 Ohms
Insertion Loss	2 dB
Attenuation Accuracy	±1.5 dB
Power Handling	5 Watts CW
Mechanical	
SMA Interface per	MIL-STD-348B
Operating Temperature	-10°C to +60°C
Materials	
Body	Passivated Stainless Steel
Contacts	BeCu
Contact Plating	Au 30µ" Min
Dielectric	PTFE
ROHS Compliant	



*Unidirectional – input is on 1dB side

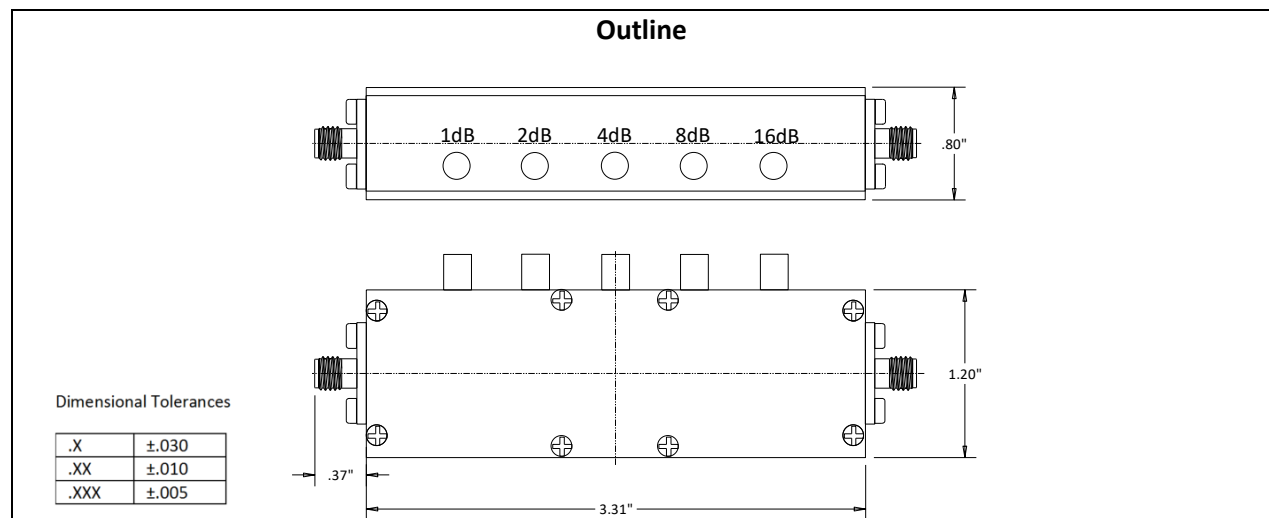

1130 Junction Dr. Suite 100. Allen, TX 75013 800-399-6891 www.CentricRF.com