




## CRF200 LMR-200 Equivalent

Rev 000

<b>Electrical</b>	
Impedance	50 Ohms
Velocity of Propagation	83%
Shield Effectiveness(> dB)	90
<b>Mechanical</b>	
Operating Temperature	-40°C to +85°C
Bend Radius(Install)	0.50" Min
Bend Radius(Repeated)	2.00" Min
<b>Construction</b>	
1. Inner Conductor	Solid Copper
2. Dielectric	Foam Polyethylene
3. Outer Conductor	Bonded Aluminum Foil + Tinned Copper Braid
4. Jacket	Black Polyvinyl Chloride
ROHS Compliant	

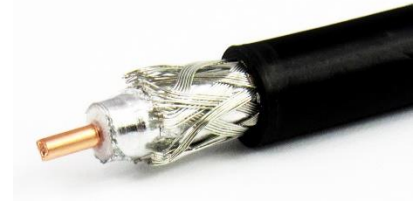

Frequency(Mhz)	150	220	450	750	900	1500	1800	2000	2500	5800
Attenuation dB/100 ft	4.0	4.8	7.0	9.0	9.9	12.9	14.2	15.0	16.9	26.4
Avg Power kW	0.35	0.29	0.20	0.15	0.14	0.11	0.10	0.09	0.08	0.05

