CS2080S-6 SMA 6-Way Power Divider 2-8 GHZ

Rev 000

Electrical	
Frequency	2-8 GHZ
VSWR	1.40(Input)
	1.30(Output)
Impedance	50 Ohms
Insertion Loss	1.6 dB
Isolation	17 dB
Amplitude Balance	±1.00 dB
Phase Balance	±8°
Power Handling	30 Watts Average
Mechanical	
SMA Interface per	MIL-STD-348B
Operating Temperature	-55°C to +85°C
Materials	
Body(Connectors)	Passivated Stainless Steel
Contacts	BeCu
Contact Plating	Au 50µ" Min
Dielectric	PTFE
ROHS Compliant	

Outline

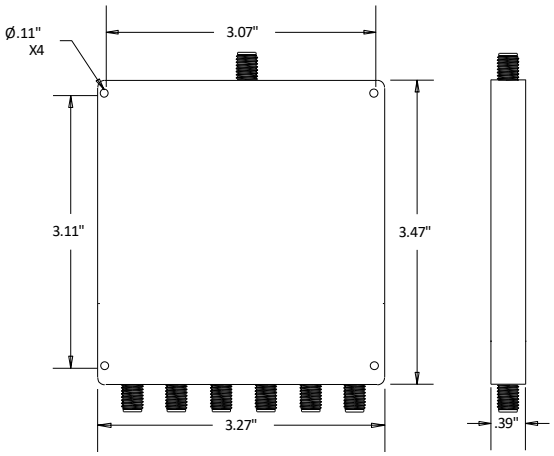

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

1130 Junction Dr. Suite 100. Allen, TX 75013 800-399-6891 www.CentricRF.com