CS6SR-4 SMA Female 4 way Resistive Power Divider 6 GHZ

Rev 002

Electrical	
Frequency	0-6 GHZ
VSWR	1.20 Max
Impedance	50 Ohms
Insertion Loss	12 ± 1.2 dB(S21, S31, S41 & S51)
Amplitude Balance	±0.9 dB
Phase Balance	±18°
Power Handling	1 Watts Max
Mechanical	
SMA Interface per	MIL-STD-348B
Operating Temperature	-40°C to +85°C
Materials	
Body(Connectors)	Passivated Stainless Steel
Contacts	BeCu
Contact Plating	Au 30µ" Min
ROHS Compliant	

Outline

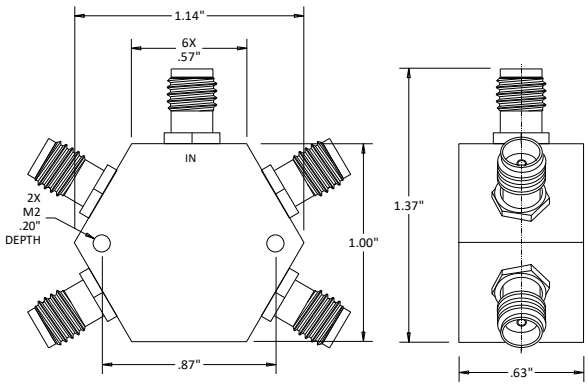

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

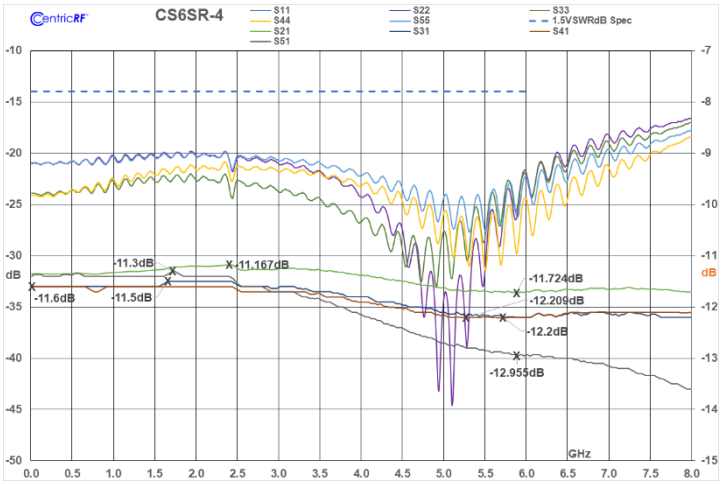

1130 Junction Dr. Suite 100. Allen, TX 75013 800-399-6891 www.CentricRF.com