




CWR284DE 7/16 Female to WR284 Coaxial to Waveguide End Launch Adapter  
2.6-3.95 GHz

Rev 000

<b>Electrical</b>	
Frequency	2.6-3.95 GHz
VSWR	1.20
Impedance	50 Ohms
Power Handling	1 kW CW
<b>Mechanical</b>	
7/16 Interface per	IEC 61169-4
<b>Materials</b>	
Body	Al
Body(7/16)	Brass
Contact	BeCu
Contact Plating	Si
Dielectric	PTFE
ROHS Compliant	



Outline

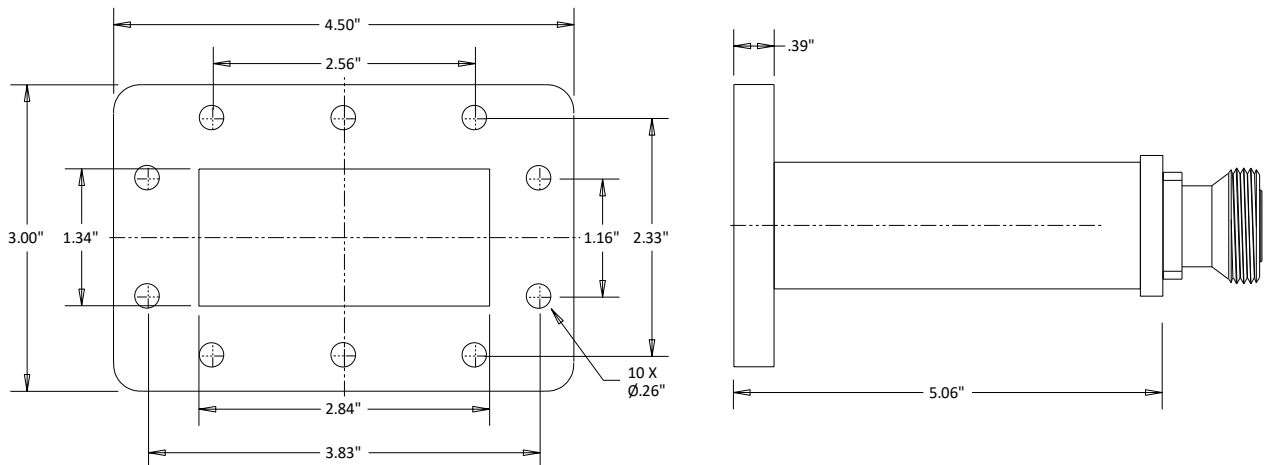

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005