




C6N2D N/Male 2 Watt Termination 6 GHz

Rev 000

Electrical	
Frequency	0-6 GHz
VSWR	1.07 Max @ 4 Ghz; 1.15 Max @ 6 Ghz
Impedance	50 Ohms
Power Handling	2 Watts
Mechanical	
N Interface per	MIL-STD-348B
Operating Temperature	-40°C to +125°C
Materials	
Body	Trimetal Alloy(Cu/Sn/Zn) Plated Brass
Contact	Brass
Contact Plating	Au 50μ" Min
Dielectric	PTFE
ROHS Compliant	



Outline

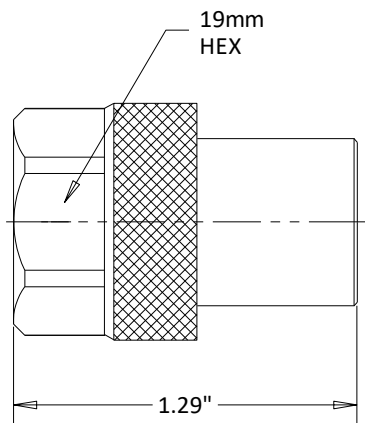

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

